



Changing Tires Is A
One Man Operation
Every Time

Pneumatic Tilt Tower
With 24" Turntable

Rigid Tower Prevents
Wheel Damage

Mounting Helper with 2
Points of Depression
Changes Low-Profile & Run-
Flat Tires Simply & Safely


Pneumatic Tilt Tower
Increases Speed & Reduces
Tech Fatigue

Shown With Optional Mounting Helper



Designed for
The "Tuff" Tires


**SEE VIDEO DEMONSTRATIONS AT
WWW.REDLINETIREEQUIP.COM**

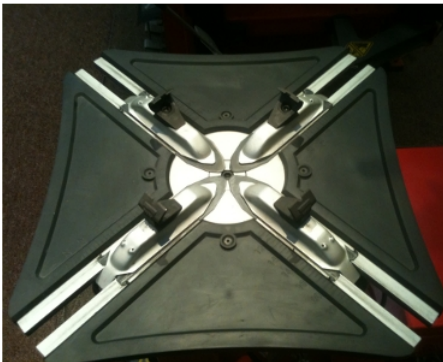

**10" - 24" Outside
Clamping Capacity**

**13" - 27" Inside
Clamping Capacity**

**Plastic Protection
For Alloy Wheels**

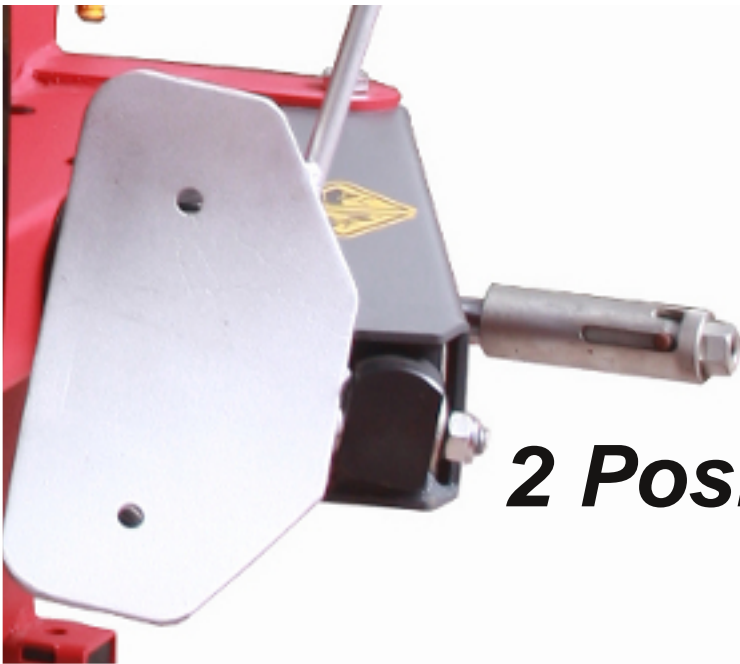

2 Position Bead Breaker

Inside Clamping	Outside Clamping	Rim/Tire Width	Rim Width	Tire Diameter	Bead Breaker Capacity	Air Pressure (psi)	HP Motor	Electric Req.	Weight	Width	Depth	Height
13"-27"	10-24"	15"	15"	40"	18"	110-170	1.6	120V 20A	775 lbs	30"	37"	72"

GRP Enterprises LLC.
 PO Box 6700
 11011 Leadbetter Rd.
 Ashland, VA 23005
 (804) 365-7959 FAX (772)402-4548 www.grpequip.com

